




Model 780A - IS Intrinsically safe certified accelerometer

Features

- Rugged design
- Corrosion resistant
- Hermetic seal
- Case isolated
- ESD protection
- Reverse wiring protection
- EMI / RFI shielded
- Hazardous area certified - intrinsically safe

Benefits

- Able to fit in small spaces
- Cross wiring will not harm sensor
- Prevents ground loops in permanent mount applications
- Can be hosed down or submersed with proper connector
- Magnet or permanent mount applications

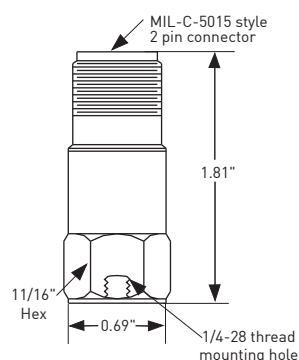

Dynamic

Sensitivity, ±5%, 25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response:	
± 5%	1 - 7,000 Hz
±10%	0.7 - 9,000 Hz
± 3 dB	0.4 - 14,000Hz
Resonance frequency	30 kHz
Transverse sensitivity, max	5% of axial
Temperature response:	
-50°C	-10%
+120°C	+10%

Electrical

Power requirement:	voltage source	18 - 30 VDC
	current regulating diode	2 - 10 mA
Electrical noise, equiv g:		
Broadband 2.5 Hz to 25 kHz		500 µg
Spectral 10 Hz		7 µg/√Hz
100 Hz		4 µg/√Hz
1000 Hz		2 µg/√Hz
Output impedance, max		100 Ω
Bias output voltage		12 VDC
Grounding		case isolated, internally shielded

Environmental

Temperature range	-50 to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 µg/gauss
Sealing	hermetic
Base strain sensitivity, max	0.0002 g/µstrain

Physical

Sensing element design	PZT ceramic / shear
Weight	62 grams
Case material	316L stainless steel
Mounting	1/4 - 28 UNF tapped hole
Output connector	2 pin, MIL-C-5015 style
Mating connector	R6 type
Recommended cabling	J10 / J9T2A

Connections

Connector pin	Function
Shell	ground
A	power/ signal
B	common

Note: Frequency response and spectral noise values are typical

Accessories supplied: SF6 mounting stud (International customers specify mounting requirements); calibration data (level 2)

Optional required accessories available:
ISBS-STD-08: MTL 7728+ safety barrier

Wilcoxon Research Inc
20511 Seneca Meadows Parkway
Germantown, MD 20876
USA

Tel: 301 330 8811
Fax: 301 330 8873

Email: wilcoxon@meggitt.com

www.meggitt.com



Class I, Div 1 Groups A, B, C, D
Class II, Div 1 Groups E, F, G
Class III, Div 1
US Class I, Zone 0, Ex ia IIC T4
Class I, Zone 0, Aex ia IIC T4



Ga Ex ia IIC T4



For hazardous area locations, sensor must be installed in accordance with installation instructions or local code requirements. Electrical safety barrier required for hazardous area installations.



98966 Rev.B 10/09